


BEST COST • 1.004 INCH BORE • STOCK DELIVERY



TYPE	No. of Rings	Length "A" Inches	Length "B" Inches
1982	2	1.52	1.62
1983	3		
1984	4	1.76	1.87
1986	6		
1988	8	2.00	2.12
19810	10	2.24	2.37
19812	12	2.48	2.56
19814	14	2.72	2.81
19816	16	2.96	3.06
19820	20	3.44	3.56
19824	24	3.92	4.06

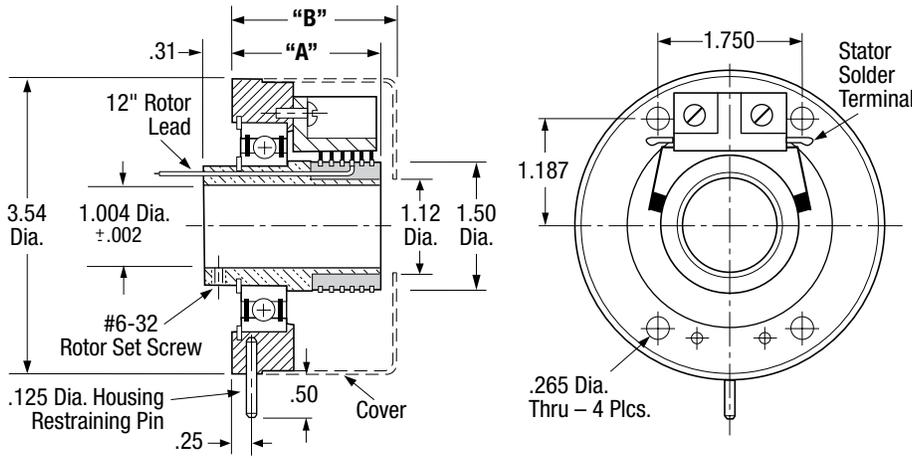

TYPE 1988

P/N1988-2BR-FAG180 pictured with and without cover.

CHARACTERISTICS

CURRENT: • 5 amp standard.
• 10 amp optional.

VOLTAGE: • Up to 60 volts standard.
• Up to 1000 volts optional.
(easily modified by increased ring to ring spacing upon request)

RINGS: • Solid Coin Silver Rings.

BRUSHES: • Silver Graphite.
• Fabricast Grade FAG 180 (80% Ag – 20% C).
• 5 amp capacity with 2 brushes per ring (1 brush block).
• 10 amp capacity with 4 brushes per ring (2 brush blocks).
• Brush complement molded as unit with diallyl phthalate dielectric.

NOISE: • 10 Milliohms maximum dynamic resistance with 2 brushes per ring.
• 5 Milliohms maximum dynamic resistance with 4 brushes per ring.

HI-POT: • 1000 VAC for 15 seconds.

ROTOR: • One piece aluminum sleeve.
• Ring complement molded as unit with diallyl phthalate dielectric.

ROTOR LEADS: • 5 amp leads – 20 AWG per MIL-W-16878 Type "E".
• 10 amp leads – 16 AWG per MIL-W-16878 Type "E".

HOUSING: • One piece aluminum structure.

COVER: • Aluminum.

OPTIONS: • 10 amp current carrying capacity.
• Hard vacuum compatible.
• Consult Fabricast for all available options.
* • Consult Fabricast for optional brush grades and characteristics (see page 14)

COMPLETE ASSEMBLY PART NUMBER CODING – Specify fully when ordering:

Type	Number of Brushes per Ring	Brush Grade Number	Options (If Applicable)
X	X	X	X
	(2BR or 4BR)	*(FAG180)	(10 amp, Vacuum, etc.)

For additional ordering information see page 11.

For Mounting and Wiring Methods, RPM Range, and Operating Environment see pages 9 & 10.

Fabricast, Inc.® MANUFACTURER OF
SLIP RING ASSEMBLIES

TELEPHONE: (626) 443-3247
FAX: (626) 443-5594
E-MAIL: sales@fabricast.com
WEB SITE: www.fabricast.com